

FREEVIEWSHOP

Firmware Upgrade instructions for the Draco 5500.


Download the Draco Loader.exe and the A0FST0M-19-0144.urt file, you will then be able to use the Loader program and a Null Modem Cable to update the software in the receiver.

You can purchase a Null Modem Cable from Freeviewshop at:


<http://www.freeviewshop.co.nz/standard-null-modem-cable-femalefemale-p-317.html>

Connect the PC serial port and Draco using the Null Modem Cable. Do not turn the power to the Draco on yet.


Once you have downloaded the Draco Loader.exe run the file and click the Establish connection icon:

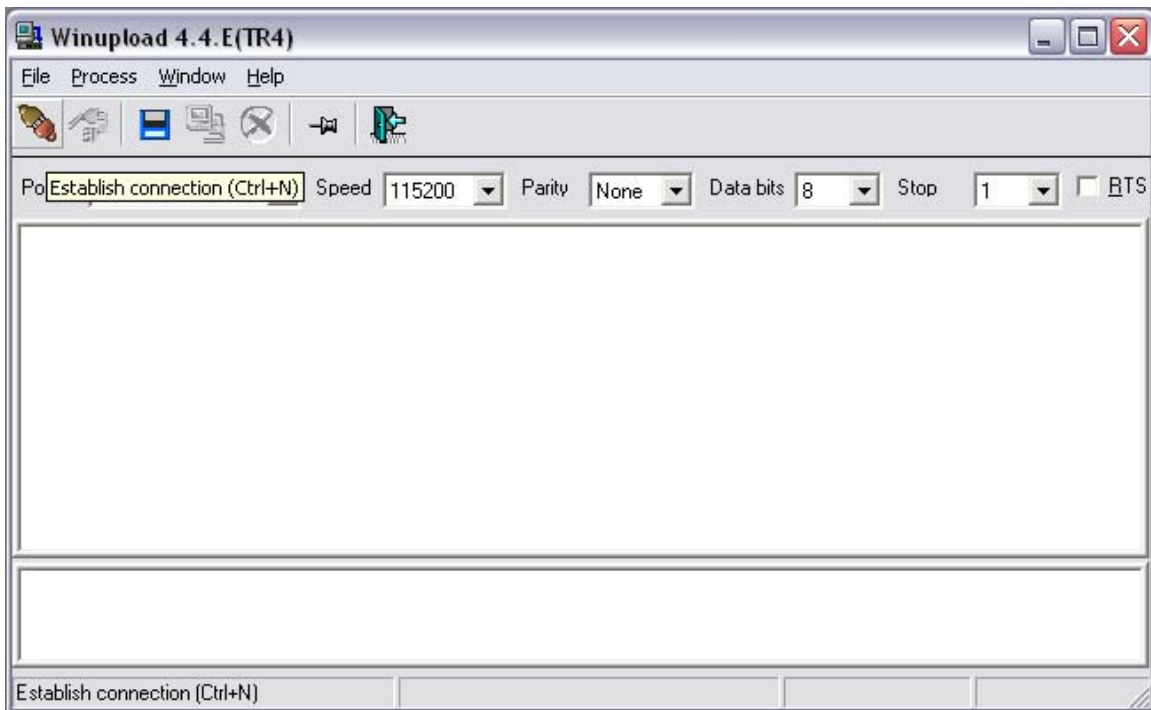


Click the Establish Upload URT file icon which will now be active:

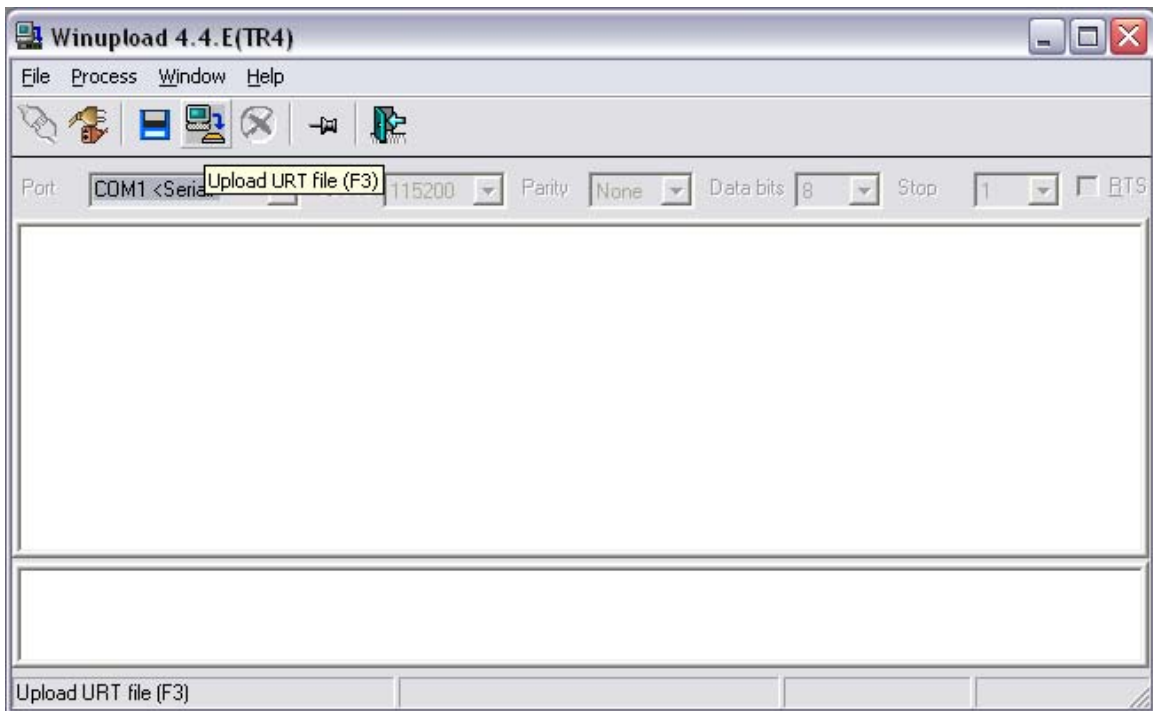


Select the AOFSTOM-19-0144.urt file and press OK:

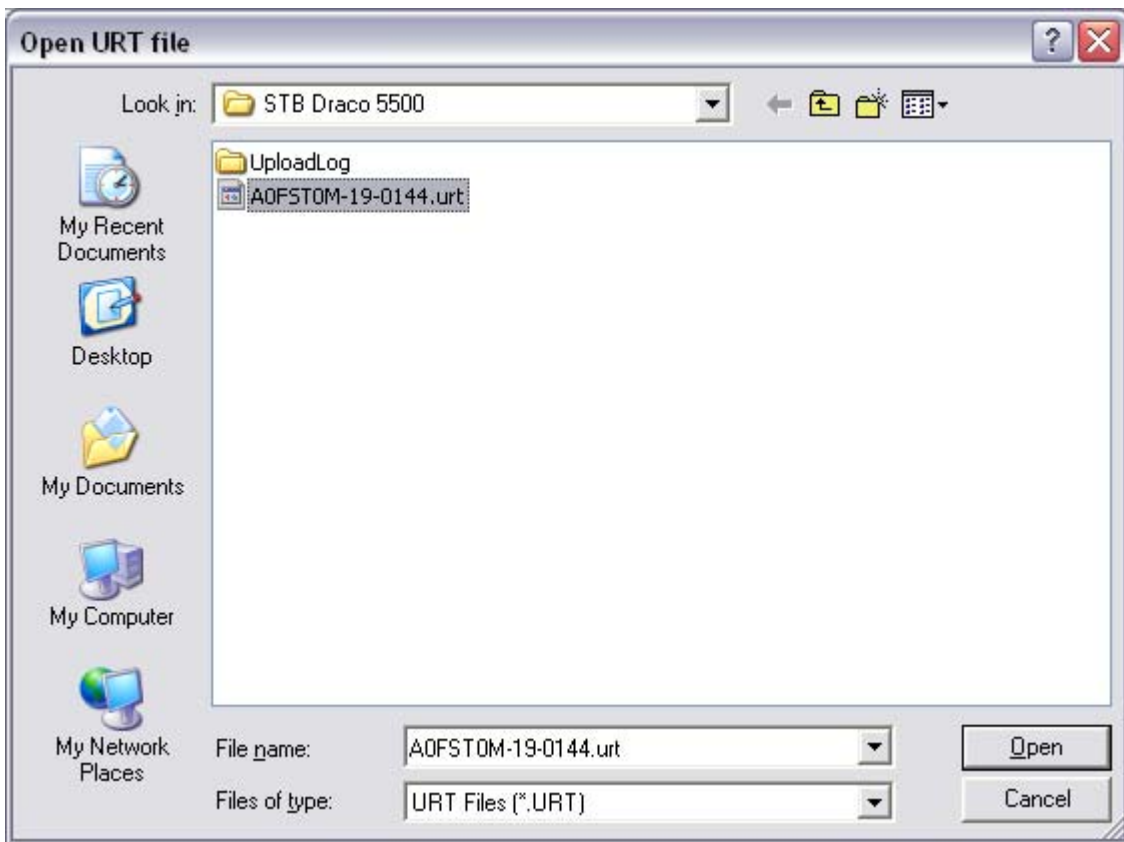

Now turn the power to the Draco on, you will see the update take place, once you see Jumping to Application you will know the update is complete.

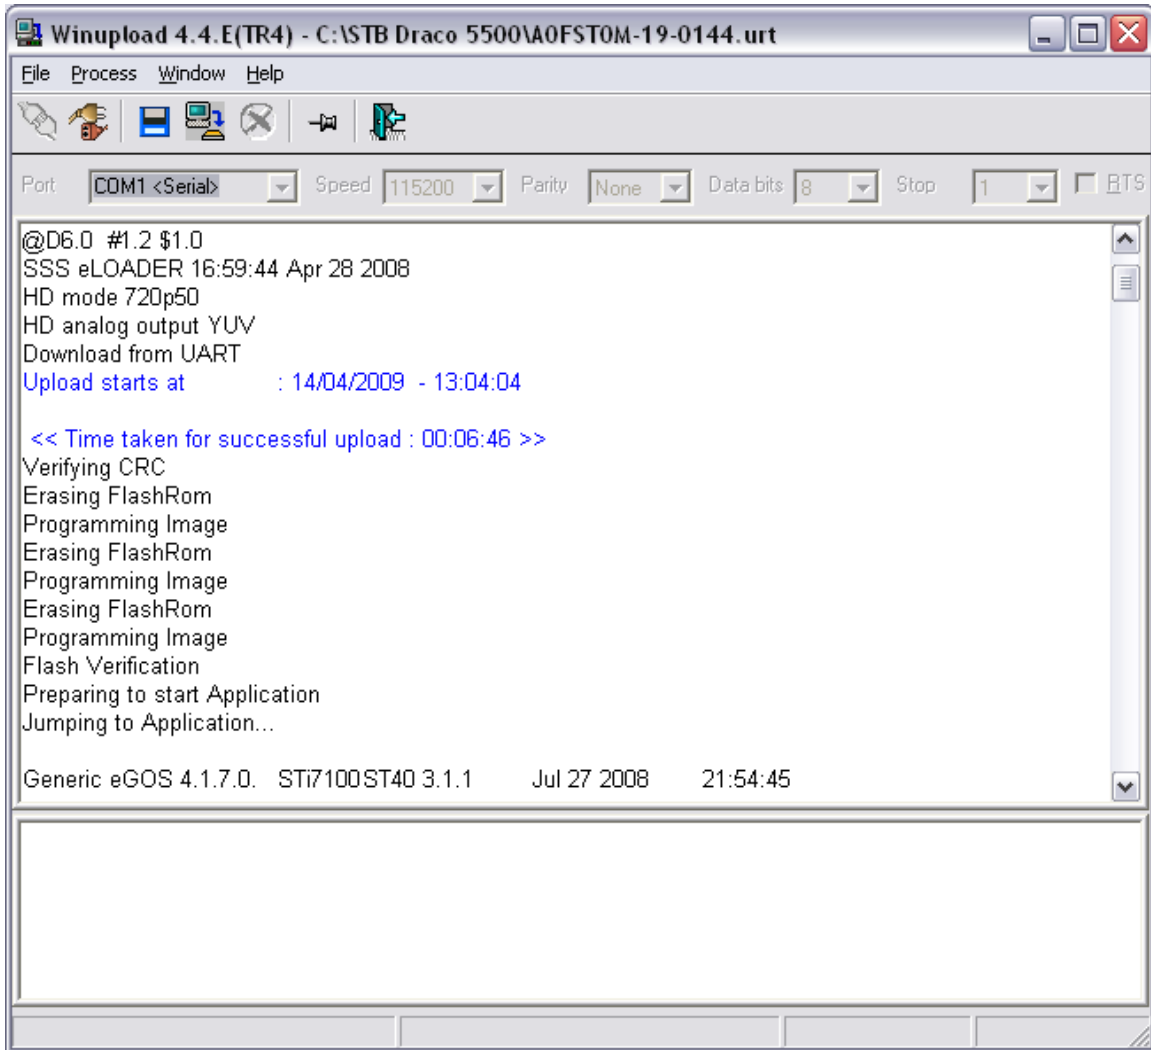


You should now connect the Draco to your TV, turn it on then press Menu.

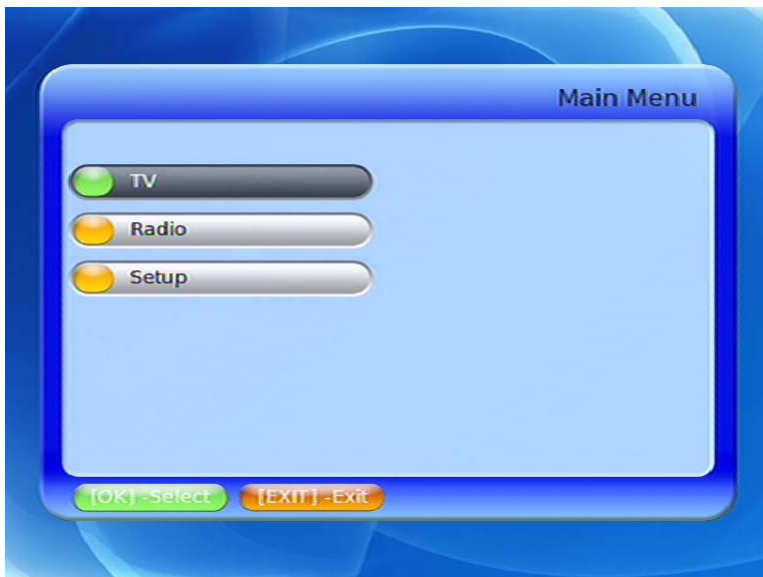

Scroll to Setup and Choose Tuning:



Now scroll to Search Mode and Choose Factory Default.

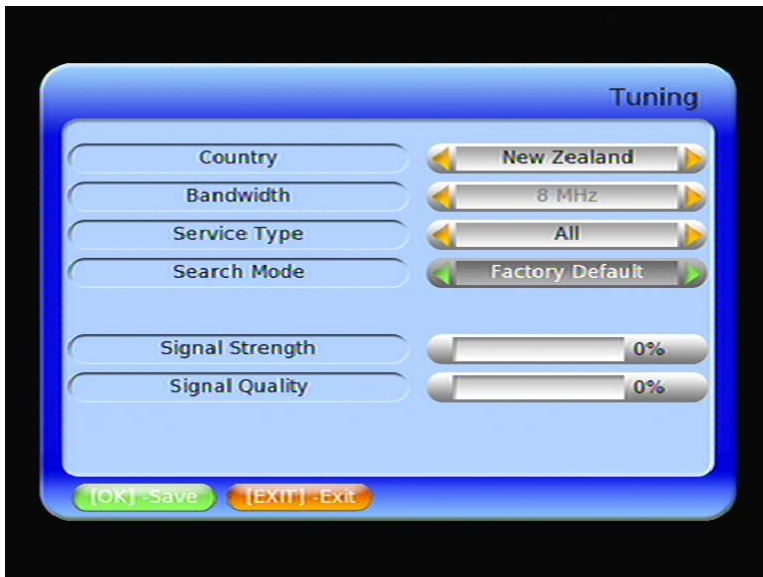

You will be asked for the password by default this is "0000", After carrying out the factory Default press OK again twice to start the Automatic Tuning which will find the Freeview HD TV and Radio Channels.