


# FREEVIEWSHOP


## Firmware Upgrade instructions for the Ultraplus F-9000HD PVR.

Download the or firmware (\*.ird) onto a USB Memory stick. You may also choose to download the channel data (\*.fdy) which contains a configuration for OPTUS D1 (11300MHz L.O. LNB) or **if you want to retain your channel and satellite configuration** you can export your own channel data to a file by using MENU > System Tools > Data Transfer > Transfer Service Data to USB storage (Don't forget to press the red button afterwards to safely remove the device).

Once you have the \*.ird and \*.fdy files on you memory stick, insert the memory stick into the Ultraplus.

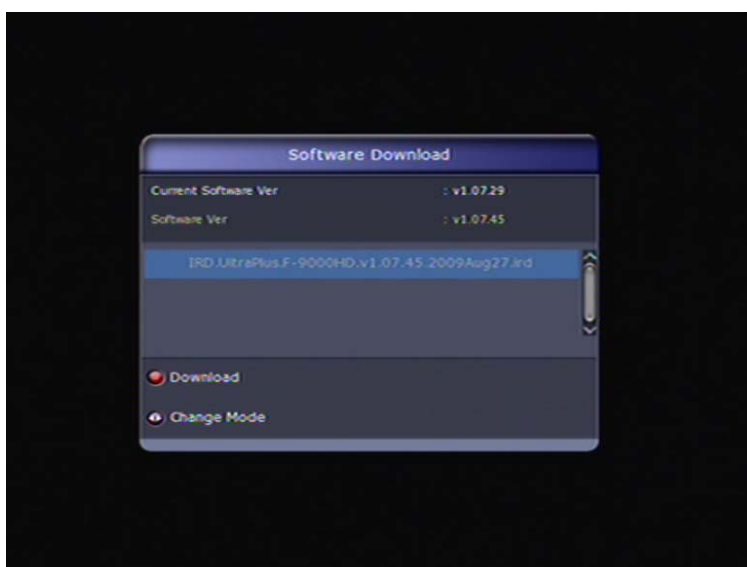

Press the Red button on the remote control to load the update. After it has finished you will see the "Download is complete" message, turn the Ultraplus off at the switch on the back remove the USB Memory stick, and turn it back on.

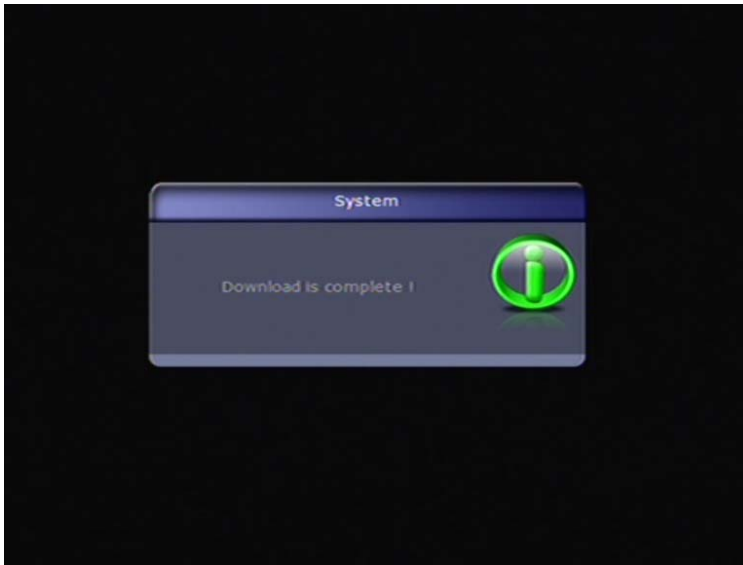

You will now see UPGRADE\_APP then the progress of writing the software to flash memory on the front panel display, once it has completed this it will start back up as normal.


Press the Menu button on the remote control and use the arrow keys to navigate to System Recovery and press OK.



Press the OK button on the remote control to restore to factory default and enter the PIN Code (Default: 0000)



Press the OK button to select English

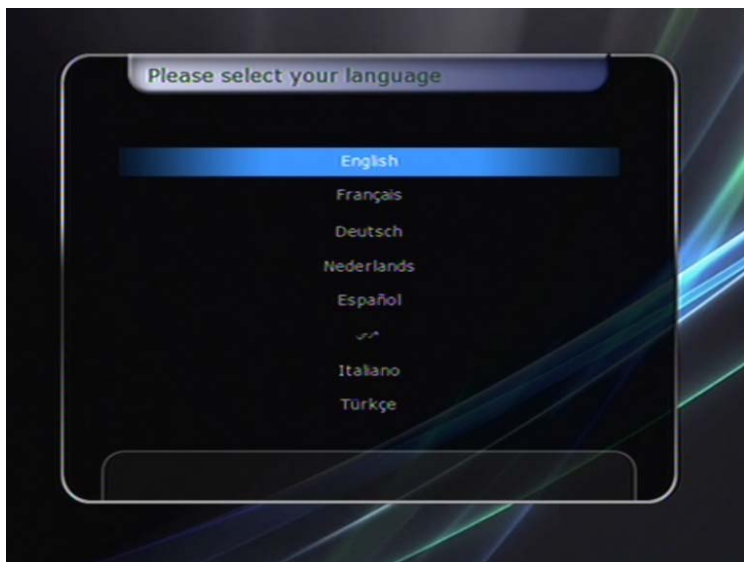


Press the OK to select the local time Zone



Scroll to New Zealand for the Daylight Savings option and press OK.



Insert the USB Memory stick again and press > to change mode.

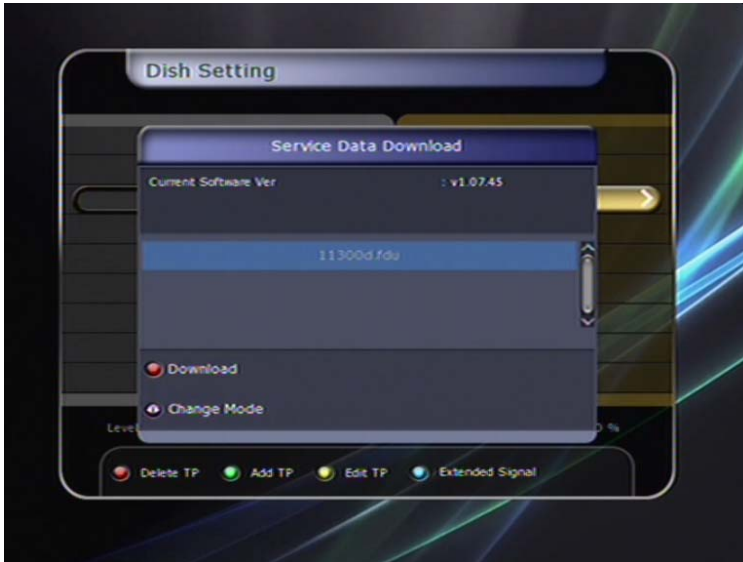

Press the Red Button to load the channel data