

FREEVIEWSHOP

Installation Instructions for using a Ultraplus 880 micro PVR with an existing dish for Freeview reception.

The Ultraplus 880 micro PVR is pre configured for a Satellite Dish aimed at OPTUS D1 (Freeview and Sky), Plug your set top box in and turn it on and select the appropriate AV input on your TV. The Ultraplus 880 micro PVR is pre configured for an 11300MHz L.O. LNB. If you see the "No Signal!" message when you select TV One and TV3 you probably don't have an 11300MHz L.O. LNB and should try changing the LNB L.O. freq to 10750MHz as shown below.



The LNB at the left below has a L.O. of 10750MHz, if you have one of these you will need to take the steps shown below:



10750 MHz




11300MHz



11300MHz

How to change the LNB L.O. frequency to 10750MHz

If you have the LNB shown on the left press **MENU** on your remote control and press **OK** to select Dish Setting.

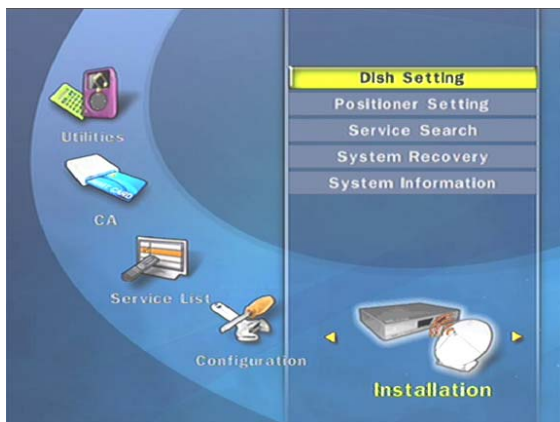

FREEVIEWSHOP

☎ 09-8175105

🌐 www.freeviewshop.co.nz
@ sales@freeviewshop.co.nz

Scroll down to LNB Frequency and press **OK**.




Enter 10750 using the number keys on the remote and press **OK**.



You should now see Level and Quality for the 12483MHz TP, press **Exit**.



Press **OK** to confirm you want to save the setting.

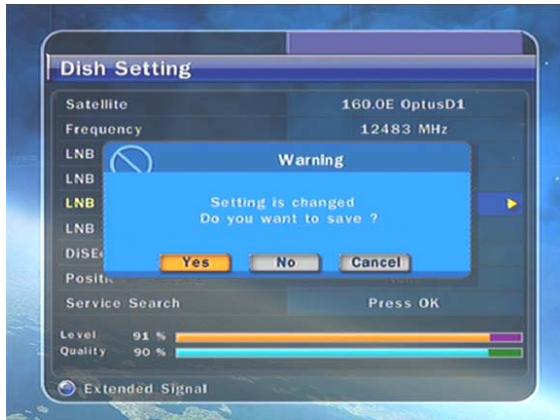

Once saved you can exit and watch TV.